Catalogue
LAUNDRY
Chapter
PROFESSIONAL LAUNDRY

Model
LAP-10 TP2 HWV 230V 1N 50/60Hz

18001731 24/03/2020

PROFESSIONAL WASHER EXTRACTOR, LAP-10 TP2 HW V

MORE FEATURES
- New TP2 scheduler with touch screen. It allows to create an indefinite number of programs (29 preestablished).
- Allows programming, importing or exporting programs and software updates via USB.
- Standard traceability: The entire washing process (temperatures, water levels) is stored in the washing machine and can be extracted to a PC via USB memory.
- WET CLEANING included in the scheduler (modifiable water levels and washing speed).
- Wash-Control, PC software for program management, traceability and other data.
- Designed for remote connections.
- Designed for multipayment system.
- 8 programmable automatic liquid dosing signals with timedelay element. With a choice of 6 extra signals.
- Reduced washing cycles (heating power 6 kW).

MORE ROBUSTNESS
- Gray skinplate.
- Tank, drum and blades made of AISI 304.
- Robust door made of aluminum.
- Industrial door lock machine door seal (no inner drum seal).
- Industrial housing and bearings.
- Frequency converter and industrial motor.

MORE VERSATILITY
- New possibility to customize the machines from factory with the available options.
- OPL -- COIN: Convertible models from self-service to OPL and vice versa.
- ONE UNIT -- COLUMN: Standard model easily installable in column.
- ELECTRIC -- HOT WATER: Standard electric model easily convertible to hot water model and vice versa.
- DRAIN VALVE -- DRAIN PUMP: Standard models easily convertible. Easy access for maintenance.

MORE EFFICIENCY
- Intelligent and manual weighing system. Automatic adjustment of water and chemicals.
- Possibility of configuring three levels of savings.
- High Factor G 450. Reduced residual humidity Reduces drying time.
- Designed for use with tanks for water recovery.

CHARACTERISTICS
- High spinning washers, not requiring anchoring to the ground.
- Tank with 4 detergent compartments.
- 2 standard water inlets.
- Equipped with a frequency converter (standard 50-60 Hz). Balancing system controlled by the same converter.
- Model with valve specially designed to wash mops.
- Includes levelers.
- CE and WRAS product certifications.
- Model with drain valve (V)
- Model with hot water heating.

OPTIONS
- Double drain

DIMENSIONS



X Width	680 mm	X Gross width	710 mm
Y Depth	742 mm	Y Gross depth	832 mm
Z Height	1138 mm	Z Gross height	1138 mm
Net Weight	150,0 kg	Gross Weight	160,0 kg
Net volume	0,546 m3	Gross volume	0,672 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Engine power	0,75 kW
Electric power	0,750 kW
Amperage (A)	3,9
Voltage	230V - 1N
Electric frequency	50/60Hz

WATER TECHNICAL SPECIFICATIONS

Pressure	H2O: 200-400kPa(2-4bar)
Water max consumption	71,40 L/h

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1,5+T 6A
Water inlet diameter	3/4"
Drain 1 diameter	2"
Drainage capacity	140 l/min

OTHERS

Load capacity 1/9	11,00 kg
Load capacity 1/10	10,00 kg
Drum volume	100 L
Drum diameter	532 mm
Drum depth	425 mm
Wash speed	50,0 r.p.m.
Max revolutions	1250 r.p.m.
G Factor	450
Fuerza máxima transmitida (kN)	1,57±0,53
Frequency of dynamic load (Hz)	18,33
Noise level	< 70,00 dB

Catalogue
LAUNDRY

Chapter
PROFESSIONAL LAUNDRY

Model
LAP-10 TP2 HWV 230V 1N 50/60Hz

18001731 24/03/2020

- Drain pump kit.
- Drain normally closed "NC". In case of power failure, the water stays inside the tank.
- 6 extra signals for dosing: a total of up to 14 available.
- Silicone door seal.
- Door with opposite opening.
- Delayed door opening, in case of power failure.
- Stainless steel fitment AISI 304.
- Designed for remote connections. (Wifi, Ethernet ...)
- Plinth that facilitates access to the machine.
- Special mop plinth (with filter).
- Plinth and water recovery tank.
- Kits for self-service: Central payment, file, wallet.
- Voltage 110 1N 50/60 Hz.
"- Voltage 440 3~ (No N) 50/60 Hz.
"

Catalogue
LAUNDRY

Chapter
PROFESSIONAL LAUNDRY

Model
LAP-10 TP2 HWV 230V 1N 50/60Hz

18001731 24/03/2020

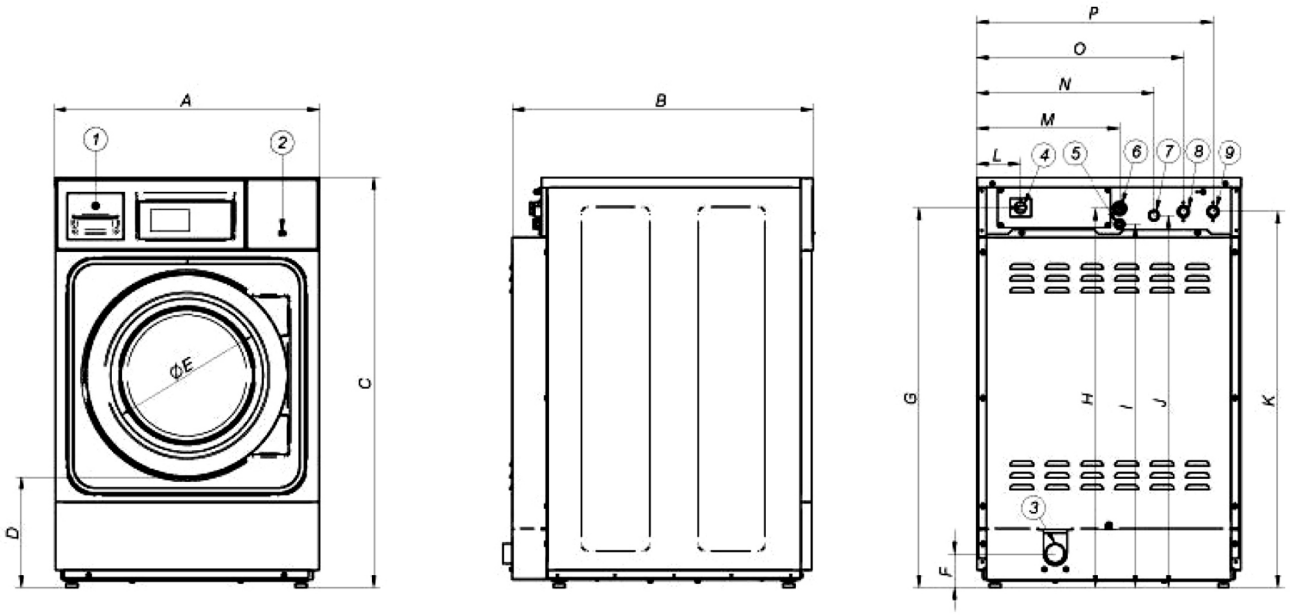

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
LAP-08 V	680	698	1040	278	373	86	964	962	922	944	954	110	366	453	528	603	199
LAP-08 P	680	698	1040	278	373	-	964	962	922	944	954	110	366	453	528	603	-
LAP-10 V	680	742	1040	278	373	86	964	962	922	944	954	110	366	453	528	603	199
LAP-10 P	680	742	1040	278	373	-	964	962	922	944	954	110	366	453	528	603	-

01. Jabonera
02. Puerto USB
03. Válvula de desagüe / Bomba de desagüe
04. Interruptor general
05. Conexión eléctrica bombas de jabón líquido
06. Conexión eléctrica
07. Entrada para jabón líquido
08. Entrada agua fría
09. Entrada agua caliente
10. Altura zócalo 389 mm

01. Soap box
02. USB port
03. Drain valve / Drain pump
04. Main switch
05. Electrical connection for soap dispenser
06. Electrical connection
07. Liquid soap inlet
08. Cold water inlet
09. Hot water inlet
10. Plinth - Height 389 mm.