



WASHING

HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY LA-11/14 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7".
- USB Connection. Online platform free of charge for programming, telemetry, data analysis... thanks to the IoT.
- Videos on display (ads, instructions, etc.).
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-Factor: G-FACTOR 500 for high spin washers.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Water Recovery tanks ready: KRS.
- Low water consumption.

VERSATILITY

- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- Drain valve < > Pump.
- Wet cleaning features.

CONNECTIVITY

- IoT - FagorKonnnect standard.
- Remote technical service.
- Management of laundries: OPL and COIN.
- Remote payment.

ERGONOMICS

- Biggest door diameters: Ø373.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Technical menu: statistics for technicians and maintenance with external console (with console option).

OTHERS

- Grey skinplate outer casing.
- Drum and tub in stainless steel AISI 304.
- Detergent dispenser with 4 compartments.
- Electronic control of imbalance with frequency control.
- LOADING AID system: water and rotation control.
- CB and WRAS approved product. Option ETL.
- High spin washers with suspended drum.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- Double drain.
- External double drain 3" (recommended for LA-11).
- Drain pump for models LA-11 and LA-14.
- Normally closed valve.
- Water FULL FLOW recirculation of bath water.
- Levelling feet.
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals).
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Plinth for mops with drawer inox/skinplate.
- Plinth to level all machines from top.
- Plinth to align the doorbase at 850mm.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime volt. electric models: 440V III 50/60 (Hz no N)l.
- Coin/token kits.
- Auto unlock kit for the door.

TECHNICAL DATA


HIGH SPIN WASHERS | LOW AND MEDIUM CAPACITY | LA-11/14 TP2

	U.	LA-11 TP2	LA-14 TP2		
DRUM					
Load capacity 1:9 / 1:10	l	11/10	14/13		
Volume	gal	100	130		
	mm	26,4	34,3		
Diameter	inch	532	620		
	mm	20,9	24,1		
Depth	inch	425	430		
	inch	16,7	16,9		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	50/1.300	50/1.204		
G Factor	-	500	500		
Maximum force transmitted	KN	2,08 ±0,75	2,49 ±1,05		
Frequency-dynamic force	Hz	16,7	16,7		
Noise level	dB	< 70	< 70		
Coin laundry version	-	Yes	Yes		
Double drain	-	No	Opt.		
Weighing System / Tilting System	-	Opt./No	Opt./No		
SLUICE option	-	No	No		
DOOR					
Height center door / Height door	mm	630/370	700 / 440		
	inch	24,8"/14,5"	27,5"/17,3"		
Diameter	mm	373	373		
	inch	14,6"	14,6"		
POWER					
Motor	kW	0,75	1,1		
Electric heating power	kW	6	9		
Total electric power (electric model)	kW	6,25	9,4		
Total electric power (hw, steam model)	kW	0,75	1,1		
CONNECTIONS		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V - I + N + T	Nº x mm²/A	3x6 / 40A	3x1,5 / 16A	3x10 / 50A	3x1,5 / 16A
	Nº x AWG/A	3x9 / 35A	3x14 / 15A	3x7 / 50A	3x15 / 15A
Tension 230V - III + T	Nº x mm²/A	4x2,5 / 20A	-	4x4 / 32A	-
	Nº x AWG/A	4x13 / 20A	-	4x11 / 30A	-
Tension 400V - III + N + T	Nº x mm²/A	5x1,5 / 16A	-	5x1,5 / 16A	-
	Nº x AWG/A	5x15 / 15A	-	5x15 / 20A	-
Steam inlet (Steam model)	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	7		8,5	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kg/cm²	2-4		2-4	
Water consumption	Lit/h	72*/88**		91*/112**	
	GPH	19,02*/23,25**		24,04*/29,59**	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
	GPM	52,8		52,8	

DIMENSIONS / PACKING DIMENSIONS

Net width / Gross width	mm	692 / 738	788 / 850
	inch	27,2"/29"	31"/33,4"
Nwt depth / Gross depth	mm	830 / 975	869 / 1.015
	inch	32,6"/38,3"	34,2"/39,9"
Net height / Gross height	mm	1.185 / 1.440	1.307 / 1.600
	inch	46,6"/56,69"	51,4"/62,99"
Net weight / Gross weight	Kg	198 / 230	236 / 274,5
	lb	436,5/507	520,29/605,1
Volume	m ³	1,03	1,38
	ft ³	36,3	48,7

*Programme ECO
**Programme 60°C

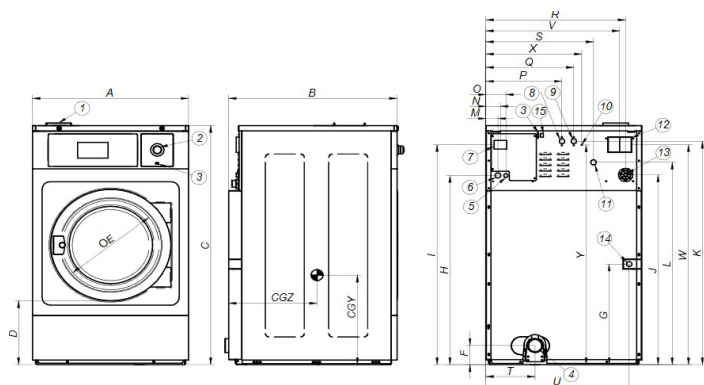

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch

- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LA-11	mm	692	830	1.185	370	373	125	354	913	1.085	916	1.100	985	61	74	101	292	352	610	448	226	626	580	1.080	442	1.145	424	577
LA-14	mm	788	869	1.307	440	373	125	385	1.034	1.202	1.037	1.221	1.106	61	74	101	385	445	706	544	243	718	676	1.202	485	1.201	450	651