WASHING

HIGH SPIN WASHERS
LOW AND MEDIUM CAPACITY
LA-28 TP2



CHARACTERISTICS

TP2
- User friendly and totally programmable 7” TP2 touch screen.
- USB Connection. Online platform free of charge for programming, telemetry, data analysis… thanks to the IoT.
- Videos on display (ads, instructions, etc.).
- 37 languages.
- 8 dosing signals as standard.

G FACTOR
- High G-Factor: G-FACTOR 450.

EFFICIENCY
- Intelligent consumption.
- Optimal loading.
- Water Recovery tanks ready: KRS.
- Low water consumption.

VERSATILITY
- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- Drain valve < > Pump.
- Wet cleaning features.

CONNECTIVITY
- IoT - FagorKonnect standard.
- Remote technical service.
- Managemant of laundries: OPL and COIN.
- Remote payment.

ERGONOMICS
- Biggest door diameters: Ø460.
- Easy opening/closing system for door lock.

MAINTENANCE
- Hinged control panel: easy and ergonomic access.
- Technical menu: statistics for technicians and maintenance with external console (with console option).

OTHERS
- Grey skinplate outer casing.
- Drum and tub in stainless steel AISI 304.
- Detergent dispenser with 4 compartments.
- Electronic control of imbalance with frequency control.
- LOADING AID system: water and rotation control.
- CB and WRAS approved product. Option ETL.
- High spin washers with suspended drum.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- Double drain.
- Normally closed valve.
- WaterFULL FLOW recirculation of bath water.
- Levelling feet.
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals).
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Plinth to level all machines from top.
- Plinth to align the doorbase at 850mm).
- Plinth for mops with drawer inox/ skinplate.
- Stainless steel outer casing.
- Stainless steel front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin/token kit.
- Auto unlock kit for the door.

TECHNICAL DATA
HIGH SPIN WASHERS | LOW AND MEDIUM CAPACITY | LA-28 TP2

	U.	LA-28 TP2	
DRUM			
Load capacity 1:9 / 1:10	Kg	31/28	
Volume	l	280	
	gal	73,9	
Diameter	mm	770	
	inch	30,3	
Depth	mm	585	
	inch	23	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	45/1.024	
G Factor	-	450	
Maximum force transmitted	KN	5,59 ± 1,75	
Frequency-dynamic force	Hz	15	
Noise level	dB	<70	
Coin laundry version	-	Sí	
Double drain	-	Opt.	
Weighing System / Tilting System	-	Opt./No	
SLUICE option	-	No	
DOOR			
Height center door / Height door	mm	865 / 560	
	inch	34"/22"	
Diameter	mm	460	
	inch	18,1"	
POWER			
Motor	kW	4	
Electric heating power	kW	18	
Total electric power (electric model)	kW	19,2	
Total electric power (hw, steam model)	kW	4	
CONNECTIONS		ELECTRIC	STEAM / HOT WATER
Tension 230V - I + N + T	Nº x mm²/A	-	3x4 / 32A
	Nº x AWG/A	-	3x11 / 20A
Tension 230V - III + T	Nº x mm²/A	4x16 / 63A	4x2,5 / 20A
	Nº x AWG/A	4x5 / 60A	4x13 / 20A
Tension 400V - III + N + T	Nº x mm²/A	5x4 / 32A	5x1,5 / 16A
	Nº x AWG/A	5x11 / 40A	5x15 / 15A
Steam inlet (Steam model)	inch	3/4"	
Maximum steam consumption (Steam model)	Kg/h	15	
Water inlet	inch	3/4"	
Water main pressure	Kg/cm^2	2-4	
Water consumption	Lit/h	182*/224**	
	GPH	48,08*/59,17**	
Drain	mm/inch	3"	
Drainage capacity	Lit/min	200	
	GPM	52,8	

DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	979 / 1.045
	inch	38,5"/55,3"
Nwt depth / Gross depth	mm	1080/1210
	inch	42,5"/47,6"
Net height / Gross height	mm	1.550 / 1.810
	inch	61"/71,2"
Net weight / Gross weight	Kg	524,5/548,5
	lb	1156,3/1209,2
Volume	m^3	2,28
	ft^3	80,5

*Programme ECO
**Programme 60ºC

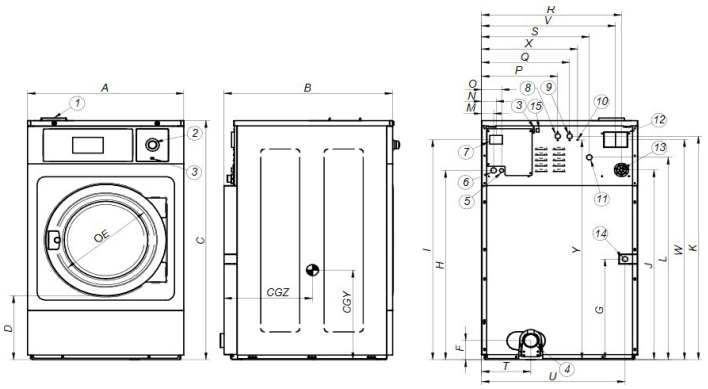

01. Soap dispenser
02. Emergency stop
03. USB port
04. Drain
05. Electric connection to liquid soap pump
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Blur output / Water overload
13. Liquid soap connection
14. Steam connection
15. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LA-28	979	1.080	1.550	560	460	125	490	1.282	1.450	1.259	1.465	1.354	61	74	101	481	561	861	673	367	909	831	1.424	624	1.510	773	735