



WASHING



HIGH SPIN WASHERS HIGH CAPACITY LA-60C/80C TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7".
- USB Connection. PC software free of charge for programming, traceability, data analysis.
- Videos on display (ads, instructions).
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-Factor 450.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Electric < > Hot water.
- WET CLEANING features as standard.

CONNECTIVITY

- IoT - FagorKonnnect standard.
- Remote technical service.
- Management of laundries: OPL.

ERGONOMICS

- Big door diameters: Ø 560 mm.
- Easy opening/closing system for door lock.

MAINTENANCE

- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS

- Drum and tub in stainless steel AISI 304.
- 3 water inlets.
- Soft mounted, free standing washers.
- Panels in skinplate.
- Easy to install, no need of fixation to the floor.
- CB and WRAS approved product. Option ETL.
- High spin washers with suspended drum.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- Double drain.
- Tropicalized model: protected board.
- Tilting options: frontal or double tilt.
- Auto Weight: automatic weighing sensor system on feet (Not available with tilting kits).
- Relay card with 6 extra dosing signals: up to 14 signals.
- Stainless steel AISI 304 outer casing.
- Double heating E+S.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.



TECHNICAL DATA

HIGH SPIN WASHERS | HIGH CAPACITY | LA-60C/80C TP2


U.		LA-60C TP2		LA-80C TP2	
DRUM					
Load capacity 1:9 / 1:10	Kg	65/59		85/77	
Volume	l	590		770	
	gal	155,8		203,4	
Diameter	mm	1048		1048	
	inch	41,2		41,2	
Depth	mm	680		892	
	inch	26,77		35,1	
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	38/875		38/875	
G Factor	-	450		450	
Maximum force transmitted	KN	18 ±4,2		23 ±4,8	
Frequency-dynamic force	Hz	12,66		12,66	
Noise level	dB	< 70		< 70	
Coin laundry version	-	No		No	
Double drain	-	Opt.		Opt.	
Weighing System / Tilting System	-	Opt.		Opt.	
SLUICE option	-	No		No	
DOOR					
Height center door / Height door	mm	1170/810		1170/810	
	inch	46"/31,88"		46"/31,88"	
Diameter	mm	560		560	
	inch	22"		22"	
POWER					
Motor	kW	15		15	
Electric heating power	kW	36		48/36	
Total electric power (electric model)	kW	39		51/39	
Total electric power (hw, steam model)	kW	15		15	
CONNECTIONS		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V - III + T	N° x mm²/A	4x25 / 100A	4X6 / 40A	4x25 / 100A	4X6 / 40A
	N° x AWG/A	4x3 / 125A	4x9 / 50A	4x3 / 120A	4x9 / 50A
Tension 400V - III + N + T	N° x mm²/A	5x16 / 63A	5x10 / 50A	5x25 / 80A	5x10 / 50A
	N° x AWG/A	5x5 / 90A	5x7 / 30A	5x3 / 90A	5x7 / 30A
Steam inlet (Steam model)	inch	3/4"		3/4"	
Maximum steam consumption (Steam model)	Kg/h	21		25	
Water inlet	inch	1"		1"	
Water main pressure	Kg/cm²	2-4		2-4	
Water consumption	Lit/h	390*/480**		520*/640**	
	GPH	103,03*/126,8**		137,37*/169,07**	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
	GPM	52,8		52,8	

DIMENSIONS / PACKING DIMENSIONS

Net width / Gross width	mm	1.420/1.600	1.420/1.600
	inch	55,9"/62,99"	55,9"/62,99"
Nwt depth / Gross depth	mm	1.433/1.595	1.645/1.805
	inch	56,4"/62,79"	64,7"/71"
Net height / Gross height	mm	1.890/1.930	1.890/1.930
	inch	74,4"/75,98"	74,4"/75,98"
Net weight / Gross weight	Kg	1.454/1.544	1.800/2.000
	lb	3205,5/3403,9	3968,3/4409,2
Volume	m³	4,9	5,6
	ft³	173	197,7

*Programme ECO

**Programme 60°C

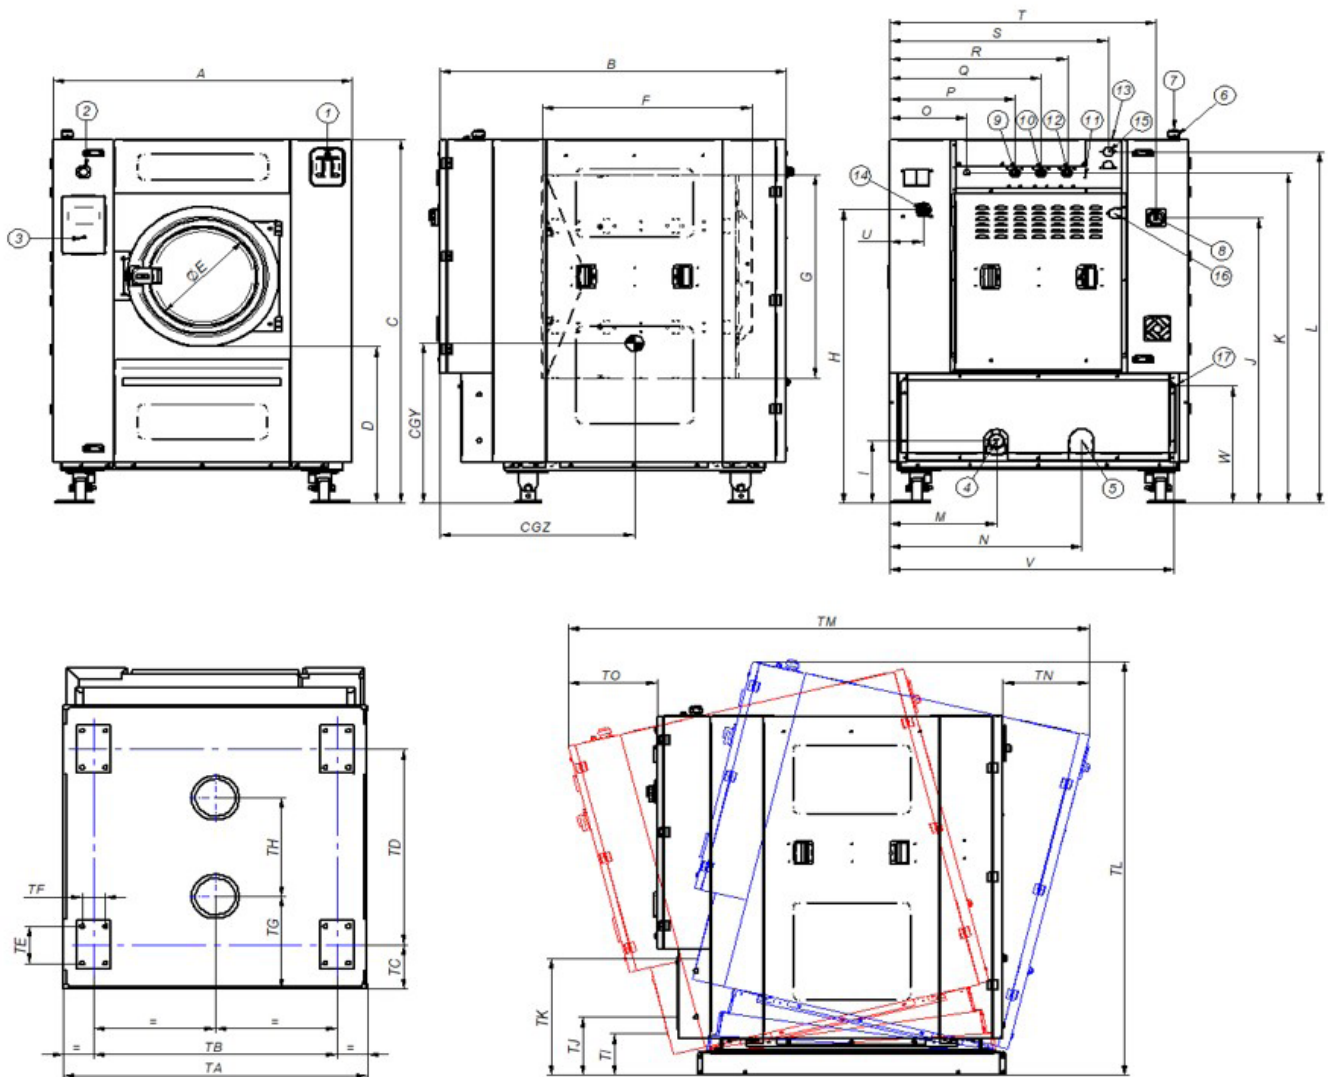

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain 1
- 05. Drain 2
- 06. Electric connection to liquid soap pump
- 07. Electrical connection
- 08. Main switch
- 09. Auxiliar water inlet

- 10. Hot water inlet
- 11. Equipotential connection
- 12. Cold water inlet
- 13. Steam output
- 14. Liquid soap connection
- 15. Steam connection
- 16. Air intake
- 17. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LA-60C TP2	1.420	1.433	1.890	810	560	760	1.050	1.563	323	1.475	1.710	1.817	508	912	367	595	720	845	1.040	1.267	160	1.353	608	1.500	348	830	820
LA-80C TP2	1.420	1.645	1.890	810	560	972	1.050	1.563	323	1.475	1.710	1.817	508	912	367	595	720	845	1.040	1.267	160	1.353	608	1.500	348	830	925

	TA	TB	TC	TD	TE	TF	TG	TH	TI	TJ	TK	TL	TM	TN	TO
LA-60C TP2	1.145	1.157	226	799	190	110	265	722	215	300	565	2.095	2.266	410	422
LA-80C TP2	1.145	1.157	226	1.011	190	110	475	510	215	300	602	2.137	2.478	410	422