IMMERSION BLENDERS

MP 450 V.V. Ultra



Specially designed for intensive use in commercial/institutional catering

robot of coupe

up to 100 litres

SALES DESCRIPTION

Ideal for blending soups and puréeing fruit and vegetables. Special institutional catering model intended for intensive use

TECHNICAL DESCRIPTION

MP 450 V.V. Ultra Immersion Blender. Single phase. Power: 500 W. Variable speed: 1,500 - 9,000 rpm. 100% stainlesssteel blades, bell and tube (total length: 450 mm). "EasyPlug" system featuring detachable power cord

| C TECH | HNICAL DATA | |
|--------------------------|------------------------------|-----------|
| Output power | 500 W | |
| Electrical datas | Single phase - Plug supplied | |
| Variable speed | 1,500 - 9,000 rpm | |
| Rate of recyclability | 95% | |
| Net weight | 5 kg | |
| Supply | Amperage | Reference |
| 220-240/50-60/1 | 2.3 Amp | 34850L |
| 240V/50/1 UK plug | 2.3 Amp | 34851L |
| 120V/60/1 | 4.5 Amp | 34855L |
| 220V/60/1 SAU* | 2.3 Amp | 34858L |
| *For commercial use only | | |

STANDARDS

Α

B

| EN 12100-1 & 2-2004, EN 60204-1-2006, EN |
|--|
| 12853, EN 60529-2000 : IP55 & IP34 |



CHARACTERISTICS AND BENEFITS

MOTOR UNIT

D

- Power 500 W
- Stainless-steel motor unit with air vents in the top section only to ensure watertightness
- Lug on motor housing serves as a rest and pivot on the pan rim for greater user comfort
- Variable speed: 1,500 9,000 rpm
- Self-regulating speed system
- New patented "EasyPlug" system making it easier to replace the power cord during after-sales servicing
- Cord winding system for tidy storage and optimum lifespan

TUBE AND BELL

- 100% stainless-steel blades, bell and tube (total length: 450 mm).
- Foot with detachable bell and blades (patented system exclusive to Robot-Coupe)
- Watertight bell design for optimum lifespan

STANDARD ATTACHMENTS

- Wall-mounted immersion blender holder
- Tool for fixing and detaching the blades

IMMERSION BLENDERS

robot @ coupe°

MP 450 V.V. Ultra

F

OPTIONAL ATTACHMENTS

- 3 adjustable stainless-steel pan supports:
 - Ref. 27363 for pans with a diameter of 330 650 mm
 - Ref. 27364 for pans with a diameter of 500 1000 mm
 - Ref. 27365 for pans with a diameter of 850 1300 mm
- 1 universal pan support:
 - Ref. 27358 screws onto pan rim






DRAWINGS & DIMENSIONS

Power cord and plug supplied

G

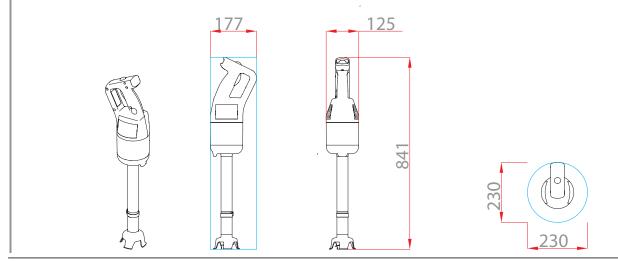

MP 450 V.V. Ultra

Specification sheet